




FROSTED
Two-Way 24/7 Privacy

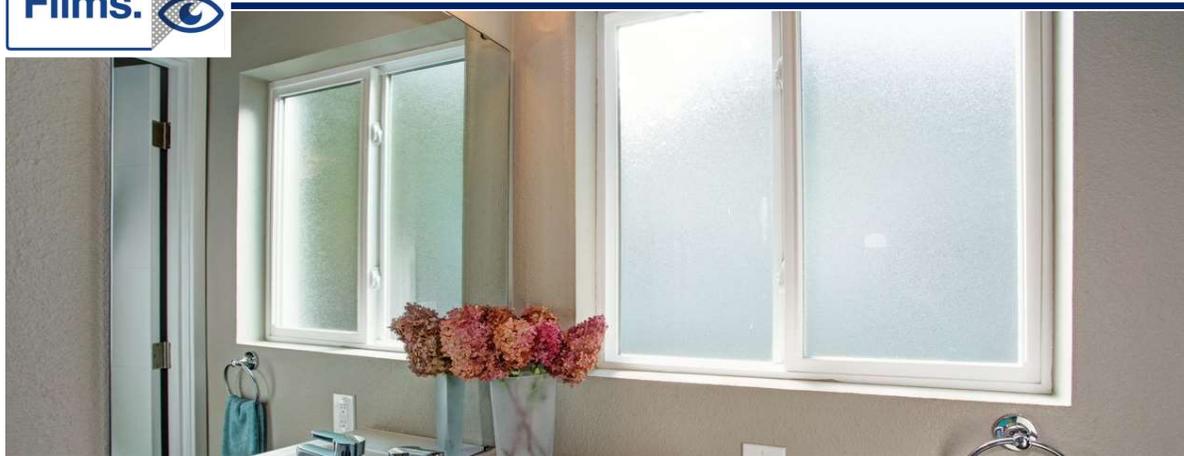

Description

A frosted non-perforated window film which blocks see-through, providing privacy on both sides of the window. It allows daylight into rooms and has a unique embossed texture which makes it more appealing than run of the mill frosted films.



Colour
Frosted white/grey

Surface type
Textured, non-perforated



Installation
Inside or Outside Window



Privacy characteristics
DAY: Total privacy
NIGHT: Total privacy
VIEW OUT: Blocked



On window durability
1 Year



Storage (22°C, 55% humidity)
1 Year

Roll Sizes Available

30metres (length) x 1220mm (width)

Technical Specification

Face film	Embossed etch PVC, translucent grey
Thickness	100micron +/- 10
Transparency	N/A
Adhesive	Clear adhesive
Protective release liner	140gsm (+/-10) white PEK paper with silicon coating
Min appl temp	10°C.

Installation Recommendations

For vertical installation on standard glass. Apply using a wet application method. Glass must be thoroughly cleaned beforehand with soap and water. Rinse and dry glass after cleaning. Not to be applied to fresh paint or ink, polycarbonate, rubber, plastic moldings and certain PVCs. In case of doubt, please test prior to final application. This product is not recommended for use around a sharp angle where there is a limited area either side of the angle. The film must not touch the rubber window moulding. Not to be washed within 24 hours of application.

* Not recommended for use on glass with coatings such as anti-reflective, self-cleaning and scratch-resistance

Maintenance care

Wash with soapy water. Gently wipe with lint cloth or soft bristled brush to remove grease and dirt. Take particular care not to damage the edges and corners. Wash off suds and leave to dry.

Solar Properties

Data calculated based on film applied to clear glass 3mm thick.

Visible light transmission	78%
Visible light reflection, exterior	10%
Visible light reflection, interior	
UV transmission	<1%
Solar energy transmission	74%
Solar energy reflection	9%
Solar energy absorption (total)	18%

Glare reduction (relative %)	
g value	0.79
Shading coefficient (SC)	

Contact Information

Contra Vision Supplies Ltd,
Victoria House 19–21 Ack Lane East,
Bramhall, Stockport, SK7 2BE,
United Kingdom
Tel. +44 161 439 9307
Email: sales@contravision.com
Web: www.contravision.com

This document is intended as a source of information, is given without guarantee, and does not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of the product for their specific intended purpose.